


Trevoli CM8-40V

Part No.	hp	kW	Inlet/Outlet	Phase	Voltage	Tank	Controller	List Price
CM8-40V	3	2200	40/40mm	1	220-240	18L	Variable Speed	\$2200

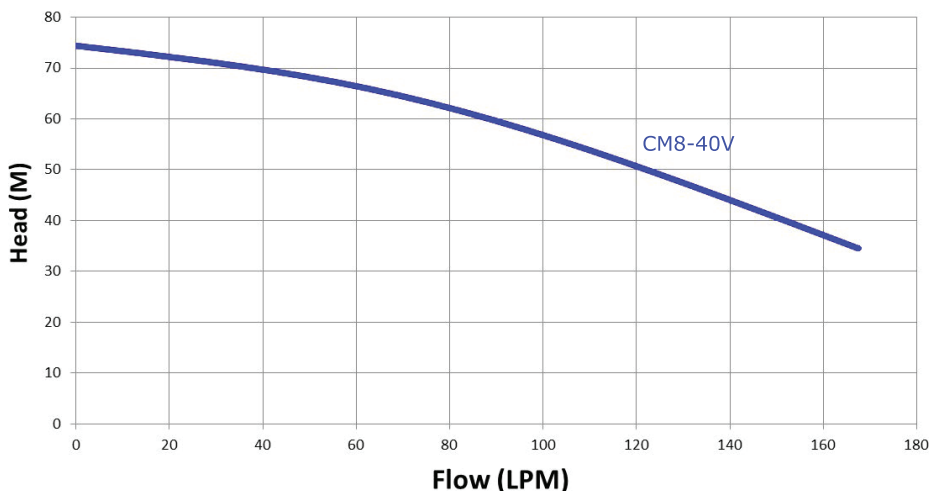

DESCRIPTION

The Trevoli CM8-40V is ideal for domestic or farm water supply, providing mains pressure for large single or multi-level homes and farms. Able to support up to 15 taps running at one time. It comes fitted with a variable speed constant pressure controller and 18L pressure tank which automatically changes the speed of the motor to maintain a set pressure which is easily adjustable. The variable speed drive eliminates the requirement for large pressure tanks and pressure switches. Ideal for mains boosting, household water supply, boosting from above ground water tanks and industrial/Farm use.

FEATURES

- Liquid temperature: 20-70c
- Maximum operating pressure: 10 bar
- Enclosure class: IP55
- Insulation class: F
- Duty rating: Continuous
- Built in thermal overload protection
- 3 pin plug

CONSTRUCTION MATERIALS

- * All wet parts are made from high quality corrosion resistant stainless steel
- * Low noise bearings
- * Stainless steel pump housing and motor shaft.

CONTROLLER

- * User-friendly interface with an LCD display screen able to display pressure, amperage and frequency information.
- * The pump has a range of protective features (22 in total) such as; dry run protection, over current protection, under current protection and thermal overload protection to ensure a long life.
- * *The controller also provides soft starts to avoid water hammer and related problems.*



Dimensions			
Model	L(mm)	H(mm)	Weight (kg)
CM8-40V	450	760	34kg